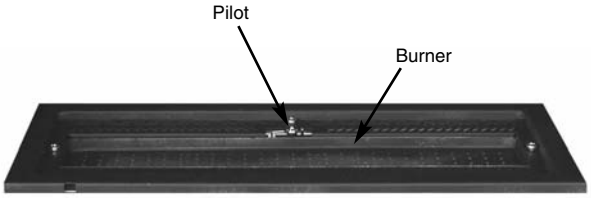

Fig. 13

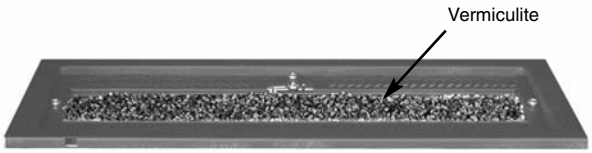

Fig. 14

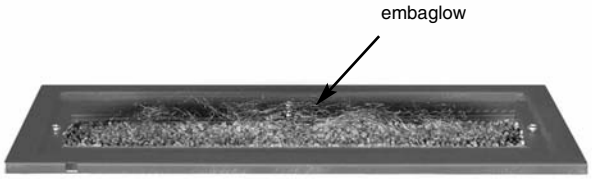

Fig. 15

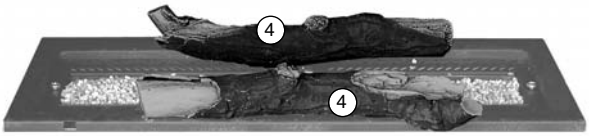

Fig. 16

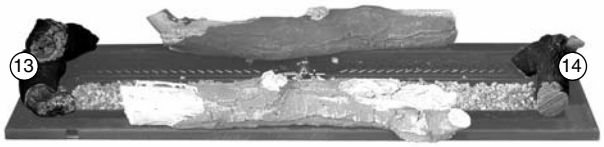

Fig. 17

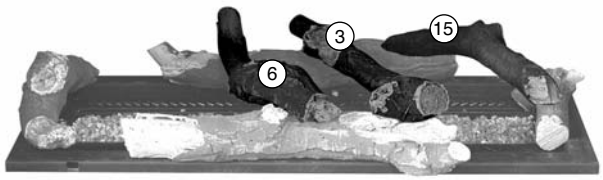

Fig. 18

It is very important that all the ceramics are used and arranged as shown in order to achieve the desired flame picture.

It may be necessary to remove some or all of the ceramics to clean them at some time. Cleaning must only be done using a soft brush.

CAUTION: The ceramics are extremely fragile and must be handled accordingly. Gloves should be worn and any inhalation of dust should be avoided. The ceramics must be kept away from children at all times. Never put additional ceramics on the fire. Never use ceramics other than those originally supplied, or genuine Legend Spare Parts.

IMPORTANT NOTICE: Always set up the ceramics on the periphery of the top panel. NEVER place the pieces directly over the mesh/ventilated areas as this will cause overheating and subsequent damage to components. Failure to follow this instruction may affect the customer warranty.

1. Fill the burner with the vermiculite supplied (Fig. 14).

2. Tease out the strands of embaglow and place onto the burner, ensuring they do not come into contact with the pilot (Fig. 15).

3. Locate the log and pine cone pieces in order as shown in Figs. 16 to 22.

Fig. 19

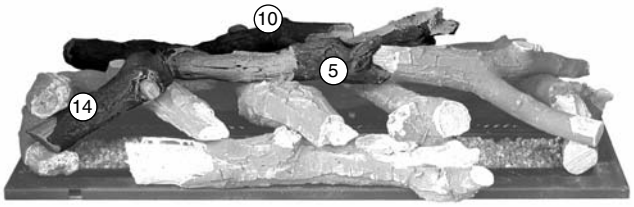

Fig. 20

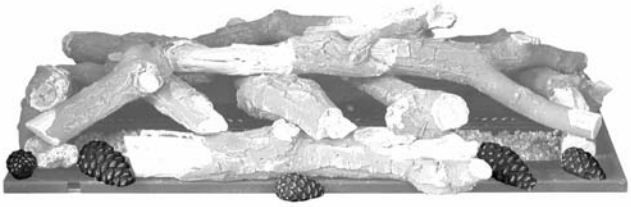

Fig. 21

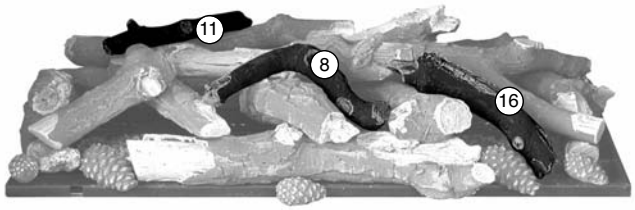

Fig. 22

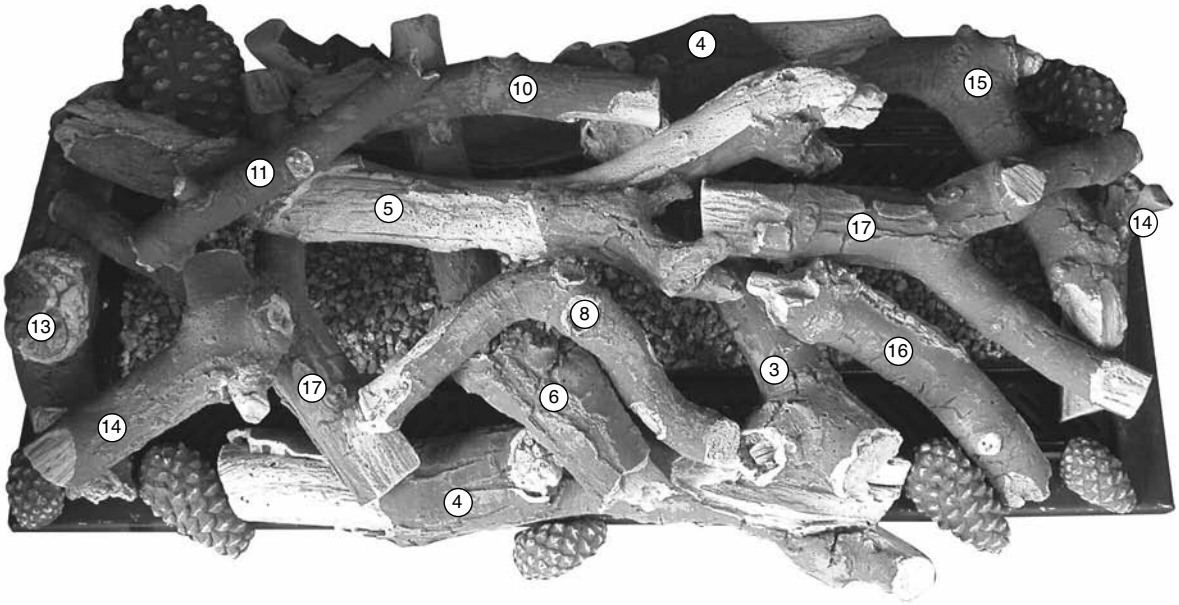

Fig. 22A

Make any adjustments necessary to achieve even gaps as this will help in giving a well balanced flame picture and an even glow. After running the fire for 30 minutes, it may be necessary to adjust the ceramics with tongs.