

Fig. 48

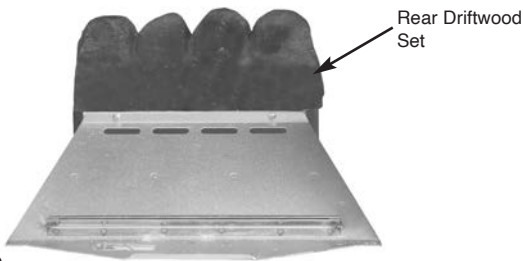


Fig. 49

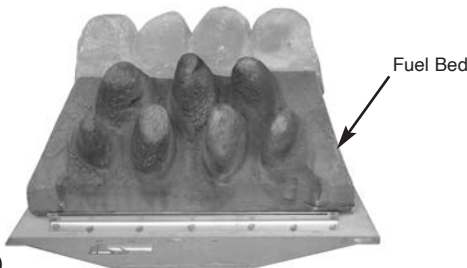


Fig. 50

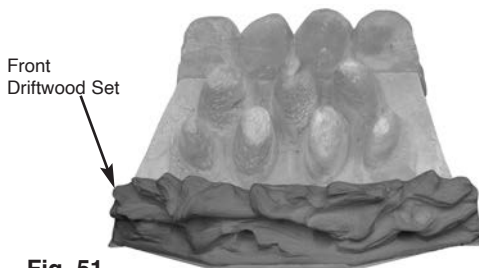


Fig. 51



Fig. 52

**It is very important that all the Driftwood is used and arranged as shown in order to achieve the desired flame picture.**

It may be necessary to remove some or all of the Driftwood to clean them at some time. Cleaning must only be done using a soft brush.

**CAUTION:** The driftwood is extremely fragile and must be handled accordingly. Gloves should be worn and any inhalation of dust should be avoided. The driftwood must be kept away from children at all times. Never put additional driftwood on the fire. Never use driftwood other than that originally supplied, or genuine Legend Spare Parts.

1. Place the rear driftwood set on the rear ceramic retainer ledge in a central position (Fig. 49).

2. Place the main fuel bed on to the middle section of the metal burner tray. It is important that the front edge of the fuel bed is located behind the burner strip (Fig. 50).

3. Position the front driftwood set on the front ceramic retainer, making sure that the back edge is pushed up against the front of the burner strip (Fig. 51).

4. Place the side cheeks into position, making sure they are positioned either side of the fuel bed and the overhang is at the front. The outside edge should be in contact with the radiant box ceramic liner. Ensure that the lower part of the side cheeks sit on the front driftwood set and are in front of the rear driftwood set (Fig. 52).



Fig. 53

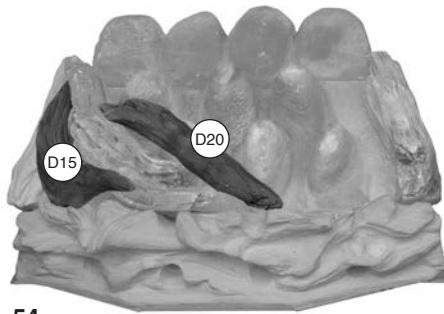


Fig. 54

5. Following Figs. 53 to 59, place the loose driftwood pieces onto the fuel bed. It is important that the driftwood 'nests' together and sits on top of the fuel bed peaks.

6. Make sure all the gaps are even in order to obtain a balanced flame picture and efficient combustion.

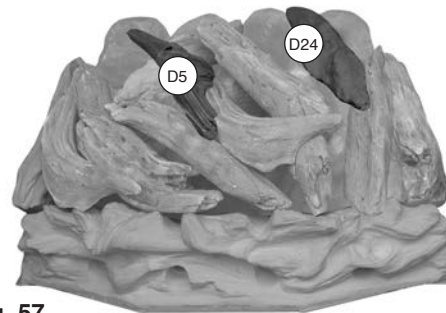


Fig. 57

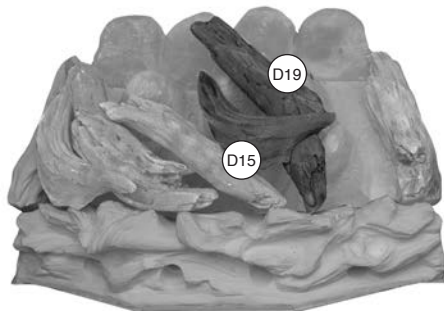


Fig. 55

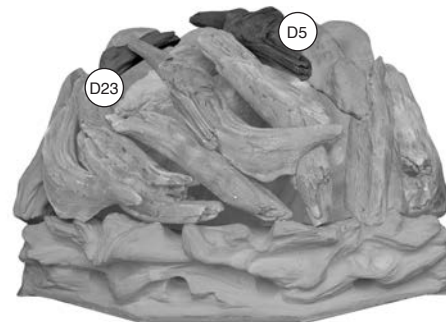


Fig. 58

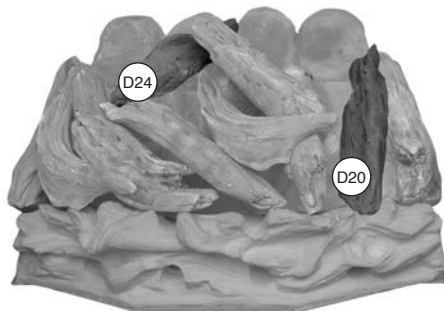


Fig. 56



Fig. 59